



•

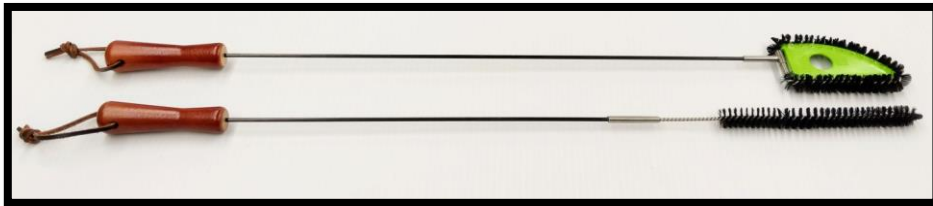


•
• !

!

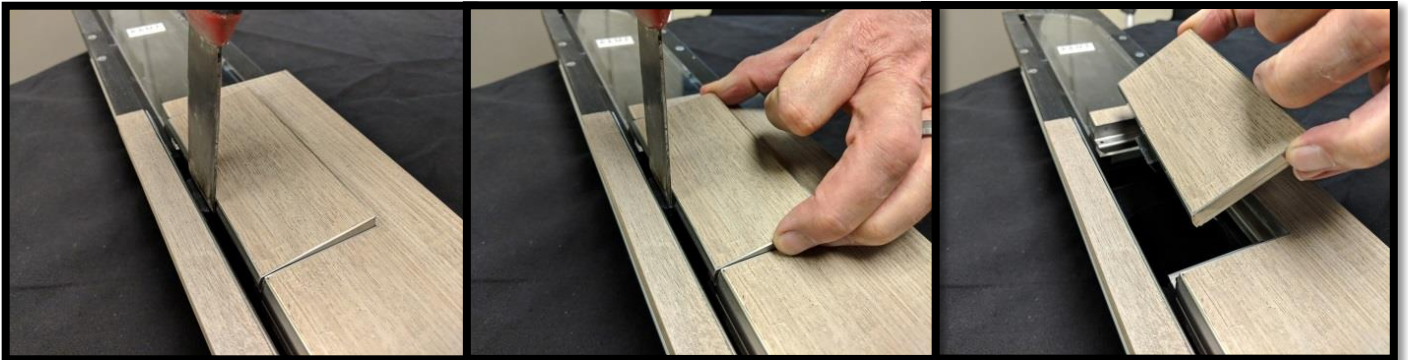

Use the access cover with a flat screwdriver or utility knife and firmly press against the black tab at the slot. The access cover will rotate upwards to be completely released.

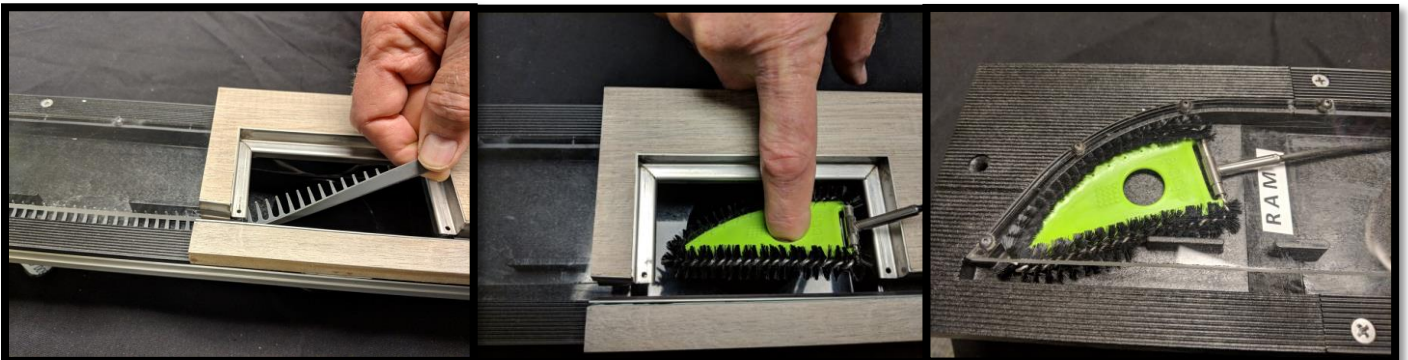

Push the hair through the access opening.

!

Push the cleaning brush to the end of the channel to remove debris from the slot.

Move back and forth to scour the interior surfaces.

